


STANDARD MODEL SPECIFICATION

Model No	Strap Width (A) mm	Loop Length (C) mm	Sewing Length (D) mm	Loop Width (E) mm	Length (B) mm
AUL-25	25	300	300	25	1m ~ 10m
AUL-50	50	350	350	25	
AUL-75	75	400	400	35-40	1.5m ~ 10m
AUL-100	100	400	400	45-50	
AUL-125	125	470	500	65-70	2m ~ 10m
AUL-150	150	470	500	80-85	

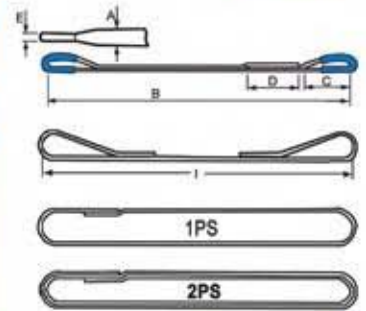

Item No. AUL-150

Item No. AUL-125


Item No. AUL-100

Item No. AUL-75

Item No. AUL-50

Item No. AUL-25

Model No. Example: **AUL-75 x 2M** (LENGTH IS AN OPTION)



SAFE WORKING LOAD (SWL)

HANGING METHOD	BREAKING STRENGTH	SAFE WORKING LOADS (SAFETY FACTOR.6)					
		VERTICAL STRAIGHT LIFT	CHOKER	BASKET			
				90°	60°	45°	30°
MODEL							
AUL-25	5000 Kgf	1000 Kgf	800 Kgf	2000 Kgf	1720 Kgf	1440 Kgf	1000 Kgf
AUL-50	12000	2000	1600	4000	3440	2880	2000
AUL-75	17500	2910	2320	5820	5000	4070	2910
AUL-100	21000	3500	2800	7000	6020	4900	3500
AUL-125	24000	4000	3200	8000	6880	5600	4000
AUL-150	28000	4500	3500	9000	7500	6100	4500