

橫樑
可調整伸縮橫樑
Spreader Beams


Adjustable Spread Telescoping Beams

Adjustable Spread Telescoping Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Spreader Beams shipped with proof load certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Standard with swivel latch hooks.
- Made in U.S.A.
- Top rigging available - call for details.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Minimum horizontal top rigging angle of 45°.
- Ideally suited for adding stability to critical lifts.

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*				A (in)
		4 - 6	6 - 10	8 - 14	12 - 20	C (in) E (in)
4,000	Part Number	12805	12822	12813	12829	1.00
	HR =	5.37	5.12	5.12	5.12	0.50
	LBS =	50	85	155	235	0.89
10,000	Part Number	12834	12842	12848	12853	1.25
	HR =	6.53	6.28	6.28	6.28	0.75
	LBS =	60	140	180	365	1.08
20,000	Part Number	12864	12872	12880	12885	1.66
	HR =	7.63	7.63	7.63	7.63	1.00
	LBS =	85	180	230	505	1.31
30,000	Part Number	12894	12925	12934	12943	2.38
	HR =	9.60	9.60	9.60	9.70	1.31
	LBS =	135	205	375	640	1.56
40,000	Part Number	13688	13683	13677	13632	2.75
	HR =	14.34	15.26	15.26	16.10	1.50
	LBS =	160	280	400	660	2.17

*Minimum horizontal top rigging angle is 45° on all fixed and adjustable spreaders. recommends a minimum horizontal top rigging angle of 60°. Adjustable on 1" increments.

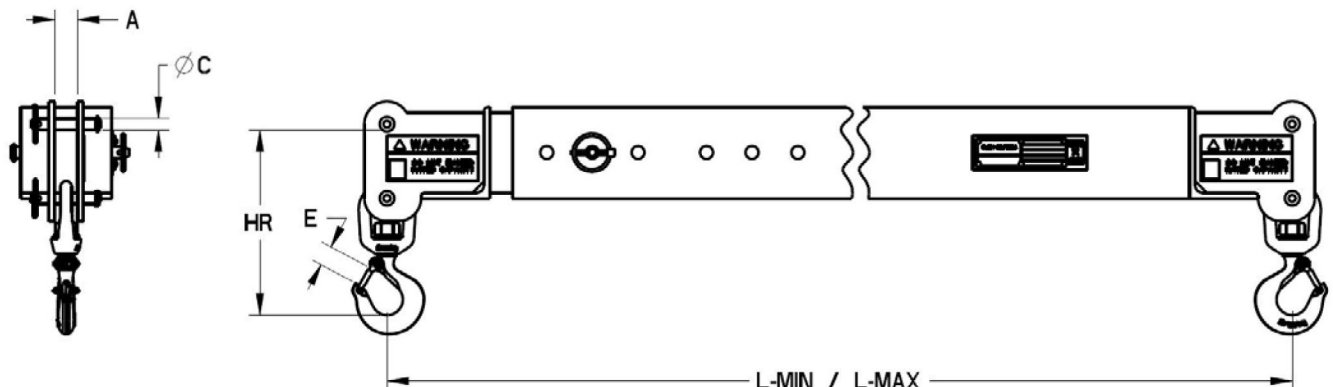

橫樑 固定橫樑

Spreader Beams Fixed Spread Beams

Fixed Spread Beams

- Manufactured to exceed all ASME B30.20 and OSHA regulations.
- Painted safety yellow for increased visibility.
- **ALL** Spreader Beams shipped with proof load certification paperwork.
- Durable construction ideally suited to jobsite or warehouse use.
- Standard with swivel latch hooks.
- Made in U.S.A.
- Top rigging available - call for details.
- Custom lettering available - call for details.
- Custom designs available - call for engineering.
- **ALL** lifting equipment individually proof loaded per OSHA requirements.
- Minimum horizontal top rigging angle of 45°.
- Ideally suited for adding stability to critical lifts.

Working Load Limit in Pounds*	Model Number Headroom (in) Weight (lbs)	Outside Spread (L) in Feet*							A (in)	C (in)	E (in)
		4	6	8	10	12	16	20			
4,000	Part Number	13094	13097	13100	13103	13106	13109	13112	1.00		
	HR =	7.37	7.37	8.12	8.12	8.12	8.12	8.12	0.50		
	LBS =	30	50	90	110	130	172	215	.089		
10,000	Part Number	13116	13119	13122	13125	13128	13131	13134	1.31		
	HR =	8.23	8.98	8.98	8.98	9.98	9.98	9.98	0.75		
	LBS =	36	87	112	140	190	250	306	1.08		
20,000	Part Number	13138	13141	13144	13147	13150	13153	13156	1.66		
	HR =	9.25	11.00	11.00	11.00	11.00	12.00	12.00	1.00		
	LBS =	55	115	140	170	195	380	470	1.31		
30,000	Part Number	13159	13162	13165	13168	13171	13174	13177	2.38		
	HR =	11.95	12.94	12.94	13.94	13.94	14.82	14.82	1.31		
	LBS =	100	140	170	285	330	510	620	1.56		
40,000	Part Number		13180	13183	13186	13189	13192	13195	2.75		
	HR =		14.67	14.67	15.50	15.50	16.37	16.37	1.50		
	LBS =		165	195	310	355	530	640	2.17		
60,000	Part Number		13208	13211	13214	13217	13220	13223	3.19		
	HR =		16.37	16.37	16.37	17.37	17.37	17.37	1.88		
	LBS =		265	310	355	470	580	765	2.28		



* Minimum horizontal top rigging angle is 45° on all fixed and adjustable spreaders. M&W recommends a minimum horizontal top rigging angle of 60°.

