

1500磅手推堆高機

能力1500磅(681公斤)

RELIABLE

HIGHER LIFT

HEAVY-DUTY

1500 lb MANUAL PUSH LIFT TRUCK

1500磅手推堆高機

NINE STANDARD MODELS DESIGNED TO LIFT FROM 50" to 150"

9種標準型號設計用於提升50"至150"

Standard features on ALL units:


所有單元的標準特性

- Frame, mast and legs are a solid weldment.
框架，桅杆和腿堅實的焊件
- Shaft mounted type forks permits fine adjustment in fork width.
軸裝式貨叉允許於貨叉寬度作微調
- Shaft mounted design permits easy removal of forks. Add attachments quickly.
軸裝式設計容易拆除貨叉快速添加配件
- Roller bearing phenolic resin wheels and ball bearing swivel casters for easier rolling.
滾子軸承酚醛樹脂輪和滾珠軸承旋轉腳輪，便於滾動
- Two leaf-type lifting chains with dual pulleys for maximum durability and reliability.
二葉式起重鏈條採用雙滑輪最大的耐用性和可靠性
- Foot parking brake-rubber foot for maximum holding pressure.
腳踏停車制動器橡膠腳墊最大保壓壓力
- Plexiglass shield for added safety.
有機玻璃防護罩以增加安全性
- Versatile handle design permits easy pushing or pulling of unit.
多功能手柄設計允許簡單的推拉機組
- Hydraulic overload relief set at about 10% above normal rated capacity.
液壓超負荷溢流設定在10%以上的正常額定容量
- Includes two, six volt three cell, lead-acid batteries rated at 225 amp/hours at a 20 hour rate
包括兩個，6伏3隔間，鉛酸電池額定在225安培/額定在使用20小時
- On board 12 volt, 25 amp automatic battery charger, 110 VAC, 3 amp input
車上12伏特，25安培自動電池充電器，110V交流電，3個安培的輸入
- Large hinged access door protects all components.
大型鉸鍊式門進入保護所有組件
- Push button control for lifting and lowering.
按鈕控制升降

OPTIONAL ACCESSORIES/FEATURES: 可選配件/特點

- AC powered for lifting. Includes appropriate controls and chord with 3 prong grounded plug for insertion into standard 110VAC, 15 amp receptacle.
- Compressed air power - replaces DC system on powered lift models. Includes air motor to drive pump; pressure regulator; air filter, moisture collector and oiler for lubrication.
- Steel & polyurethane wheels.
- Steel platform attachments in various configurations.
- Boom attachments, pole attachments, and attachments for drums.
- Remote control pendant.
- Key lock-mounted on upper control panel.
- Hour meter - accumulates working time.
- Battery fuel gauge.
- Sealed maintenance free batteries and charger.

(Additional accessories listed on reverse side)

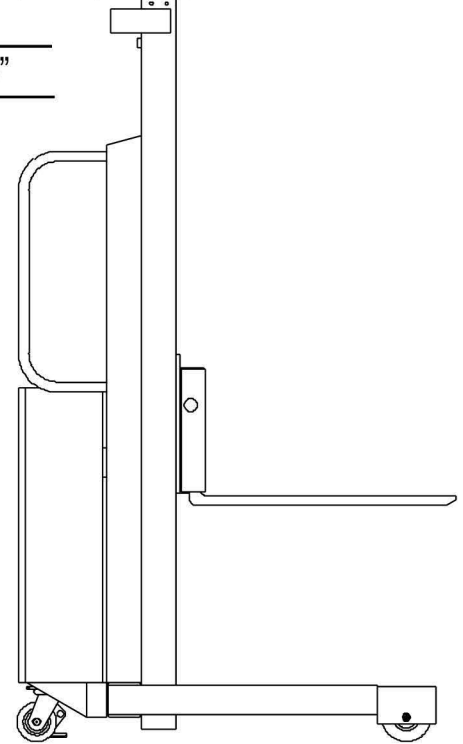

The unique features of the 1500 series are a 20" load center with lifting forks 1" thick x 4" wide and 26" long. The forks descend flat to the floor between the legs. The telescopic models offer full free lift and permit the forks to raise through more than 1/2 of maximum lift before inside mast section extends.

本1500系列機種特性是20"荷重中心附有吊升貨叉1"厚X4":寬26"長，貨叉可下降至地板上(雙腿間)或水平，伸縮式提供完全自由升起和在內部主桿段伸長並允許貨叉升到比最大吊升高度的1/2

1500磅手推堆高機

能力1500磅(681公斤)

ADJUSTABLE
1500 pound -
Manual Push/
Manual Lift
Load Boosters
1500磅(681公斤)手動和
吊升荷重增加器


RELIABLE

HIGHER LIFT

HEAVY-DUTY

DIMENSIONS and PERFORMANCE DATA

尺寸和性能數據

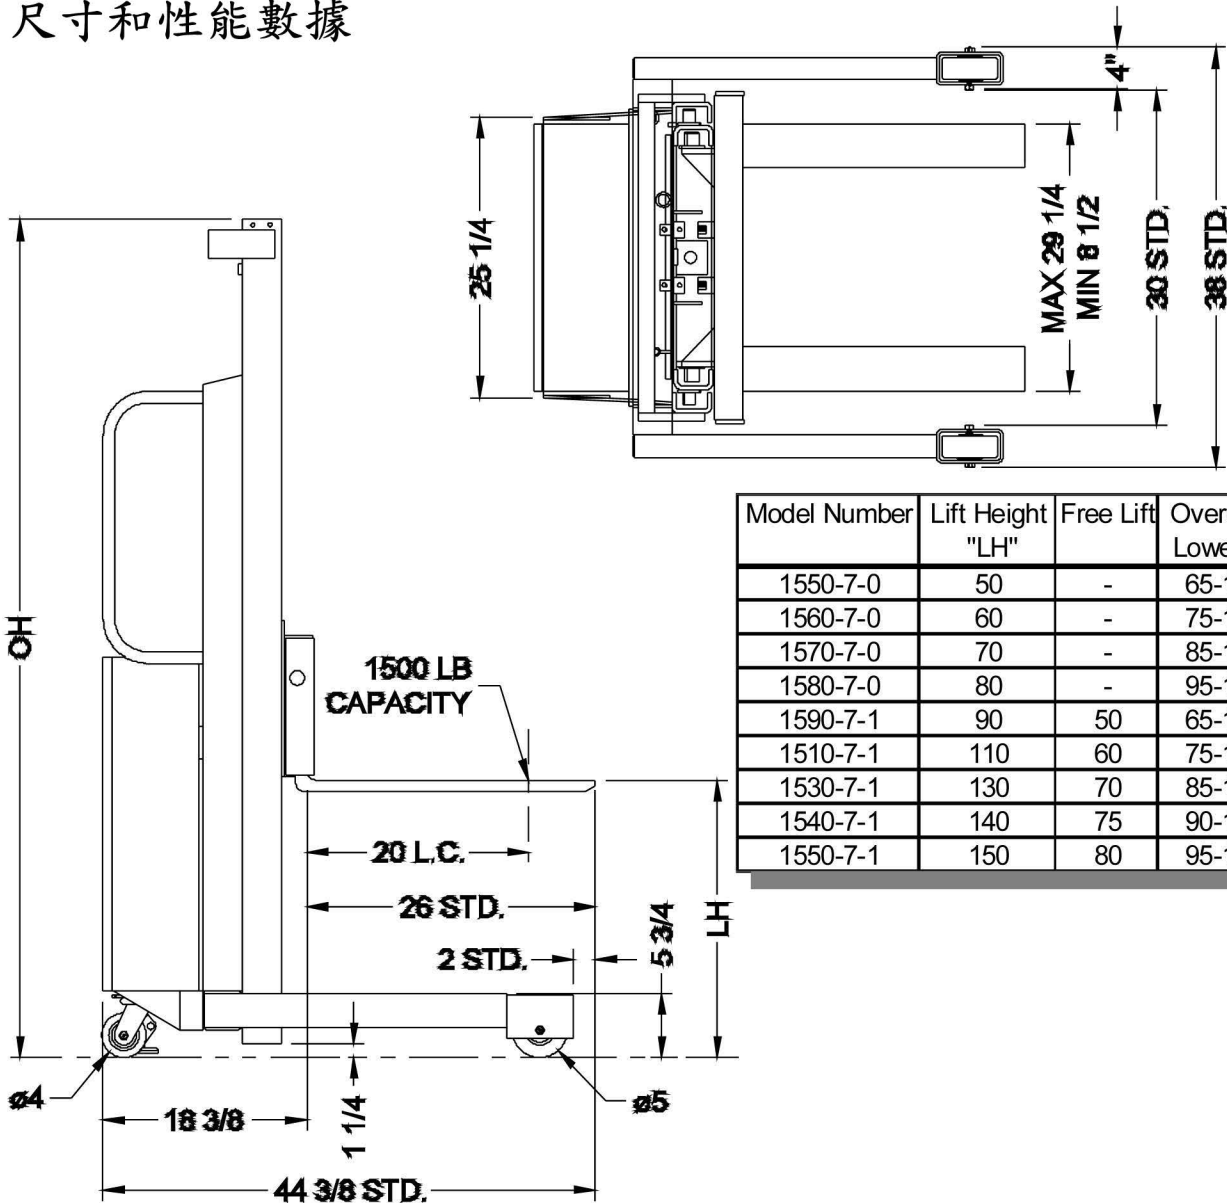

Model Number	Lift Height "LH"	Free Lift	Overall Height "OH"	
			Lowered	Raised
1550-7-0	50	-	65-1/2	-
1560-7-0	60	-	75-1/2	-
1570-7-0	70	-	85-1/2	-
1580-7-0	80	-	95-1/2	-
1590-7-1	90	50	65-1/2	105-1/2
1510-7-1	110	60	75-1/2	125-1/2
1530-7-1	130	70	85-1/2	145-1/2
1540-7-1	140	75	90-1/2	155-1/2
1550-7-1	150	80	95-1/2	165-1/2

ADDITIONAL OPTIONAL FEATURES

其他可選特點

- Wider straddle width - fixed legs - 30" between legs is standard. Any other dimension from 31" through 50" may be specified. Narrow width legs are also available.
- Adjustable straddle width, adjusts from 34" to 50".
- Longer forks and legs - 36", 42", and 48" length forks are available.
- Low profile legs - 3 1/2" high. (Standard height is 5 3/4")
- Additional lift height for special applications.